



LED LINE 40 recessed

LED LINE 40 wpuszczany

Category: systems

Power dependent on version

Light source: LED, integrated

Dimming options: DALI, switchDIM



Integrated light source

Gear included.

BV: 4,8W/m 360lm/m EV: 14,4W/m 1150lm/m.

AVAILABLE FINISHES:

STRUCTURE ADDITIONAL

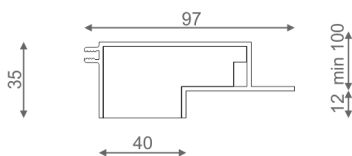

Tolerance for dimensions ± 1 mm

Warranty period 5 years

AVAILABLE VERSIONS:

L827	Low power - Low power	2700K	CRI>80
M827	Medium power - Medium power	2700K	CRI>80
L830	Low power - Low power	3000K	CRI>80
M830	Medium power - Medium power	3000K	CRI>80
L840	Low power - Low power	4000K	CRI>80
M840	Medium power - Medium power	4000K	CRI>80

AVAILABLE FINISHES:

STRUCTURE

black structure	-12	white structure	-13
gold structure	-19		

ADDITIONAL

grey	-16	copper	-17
------	-----	--------	-----