



LENS LINE LED section surface

LENS LINE LED section natynkowy

Category: surface

Power dependent on version

Light source: LED, integrated

Dimming options: DALI, switchDIM, Phase-Control, AQsmart

Integrated light source

Gear included.

AVAILABLE FINISHES:

MIX STRUCTURE ADDITIONAL




AVAILABLE VERSIONS:

L927	Low power - Low power	2700K	CRI>90
M927	Medium power - Medium power	2700K	CRI>90
L930	Low power - Low power	3000K	CRI>90
M930	Medium power - Medium power	3000K	CRI>90
L940	Low power - Low power	4000K	CRI>90
M940	Medium power - Medium power	4000K	CRI>90

AVAILABLE LUMINAIRE LENGTH:

96 cm
149 cm
202 cm

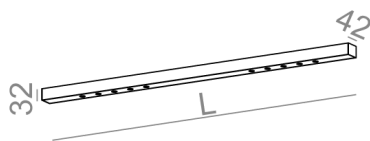

Tolerance for dimensions ± 1 mm

Warranty period 5 years

AVAILABLE FINISHES:

MIX			
mix	-06		
STRUCTURE			
black structure	-12	white structure	-13
gold structure	-19		
ADDITIONAL			
grey	-16	copper	-17