




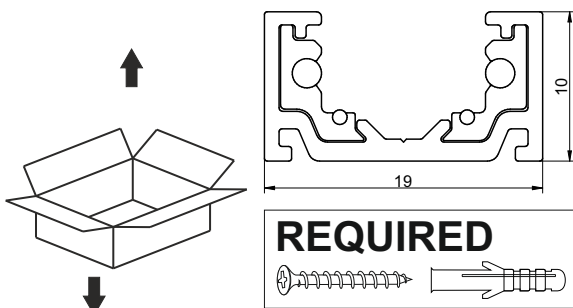

straight microtrack
line requirement




microtrack
connectors

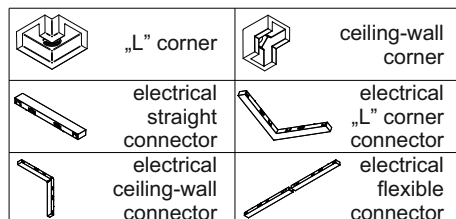


power supply dimensions


DRIVER	60W	100W	200W
L [mm]	163	300	390
M [mm]	43	30	30
H [mm]	32	17	23

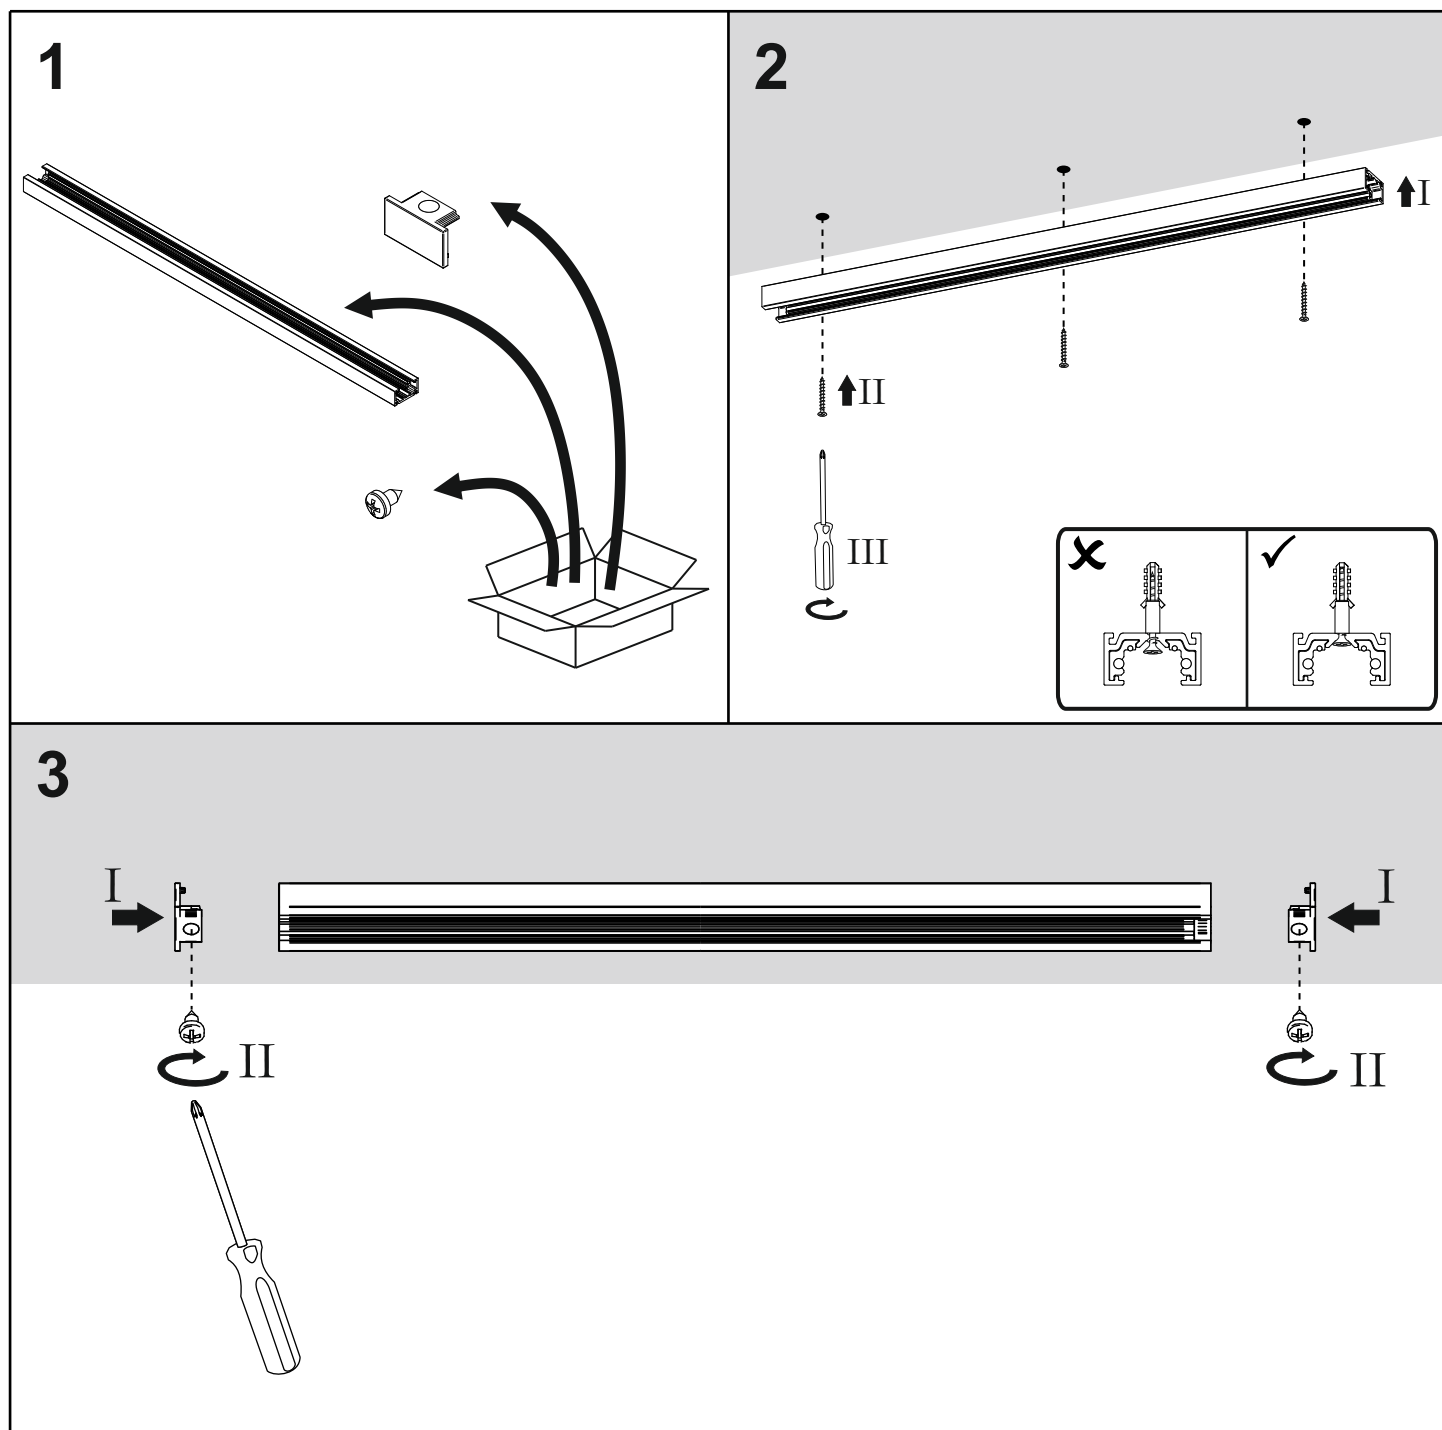


Power end cap surface (SOPMU00B)

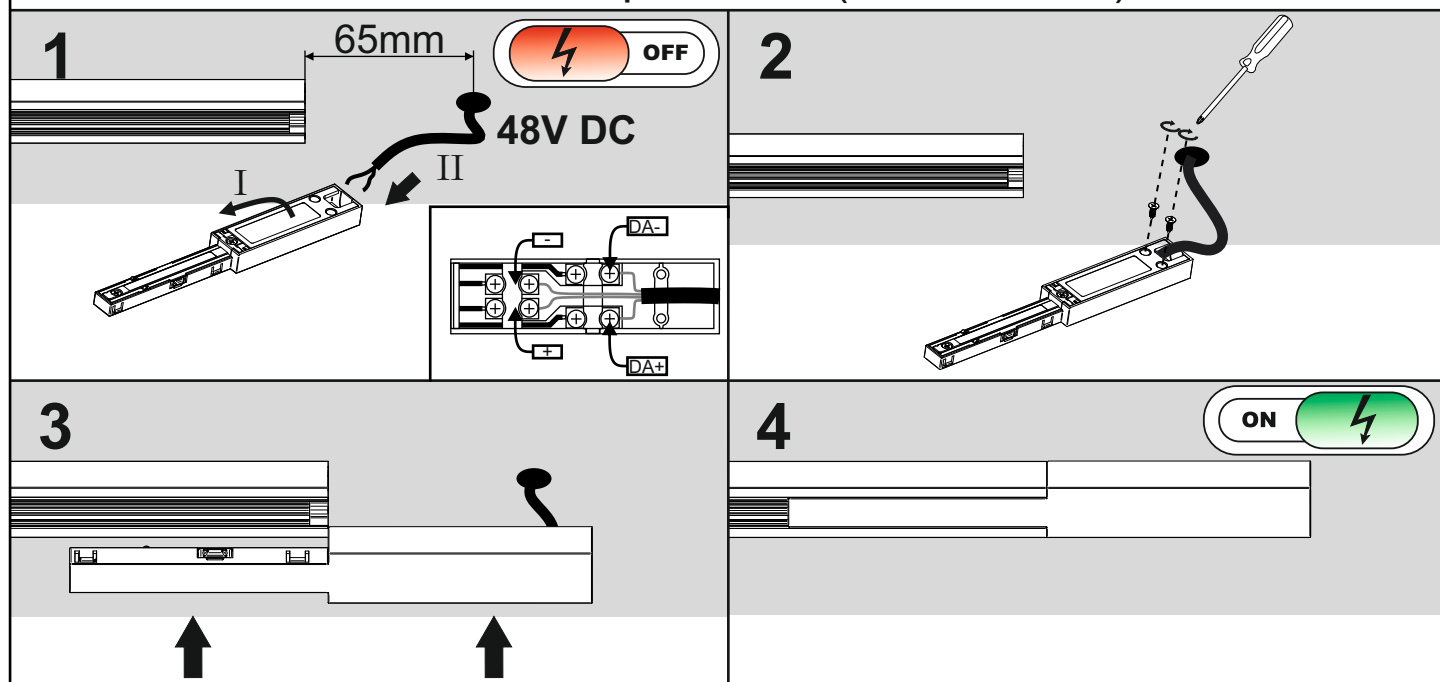

Power end cap with wire (SOPCU00B)

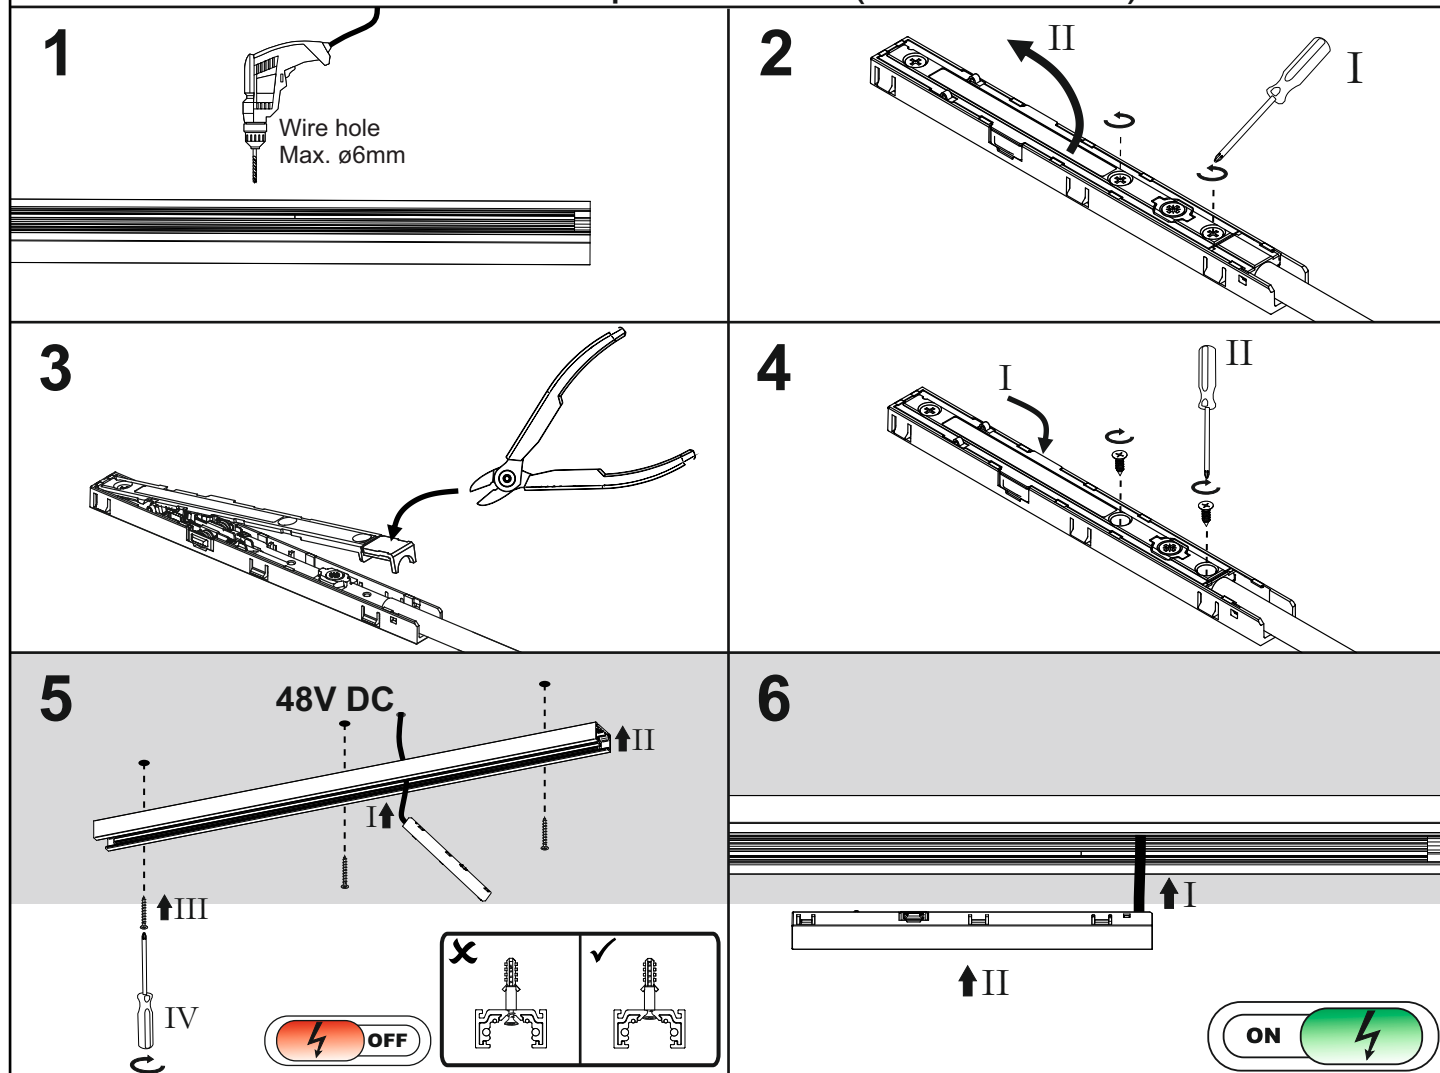


Power box (SOCP2PBB)

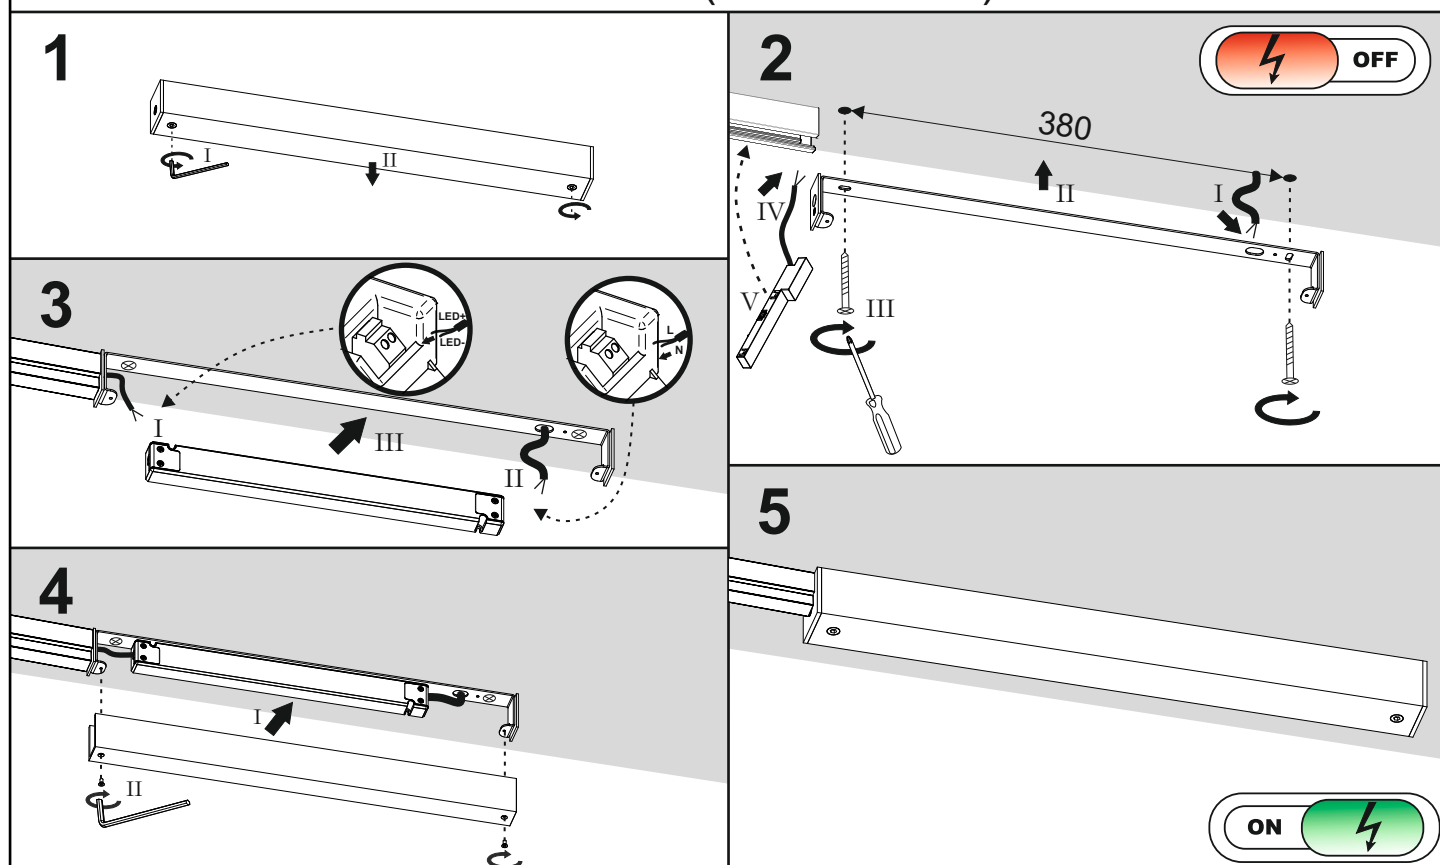


mechanical connection

„L” - connection

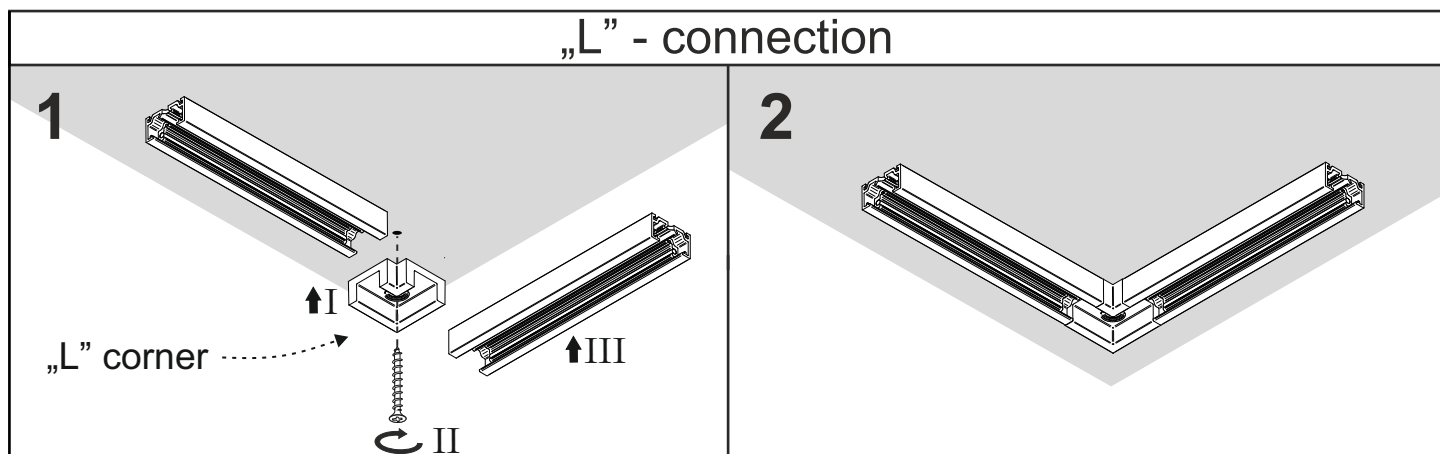


ceiling-wall connection

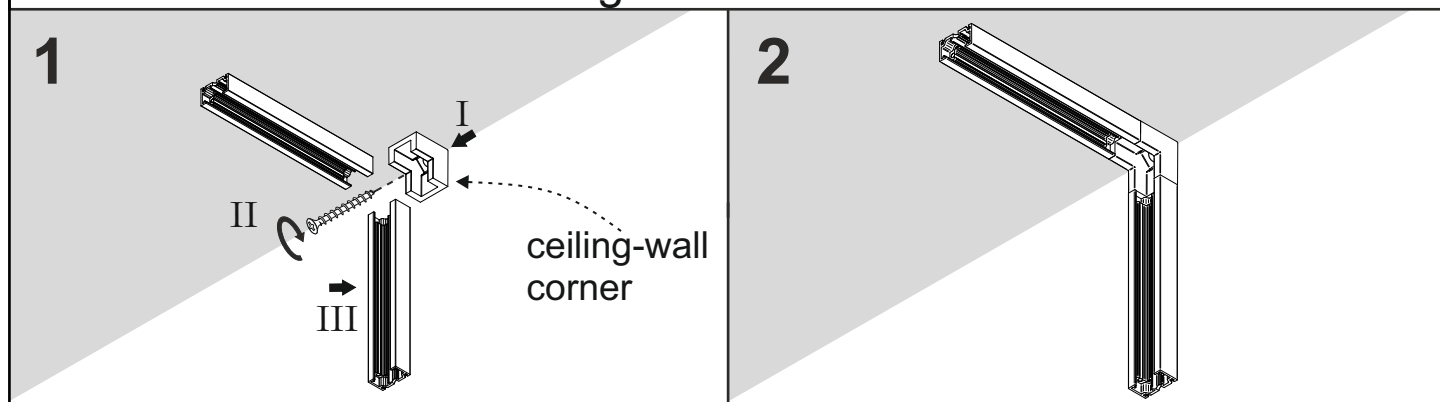

electrical connection


„L” - connection

1

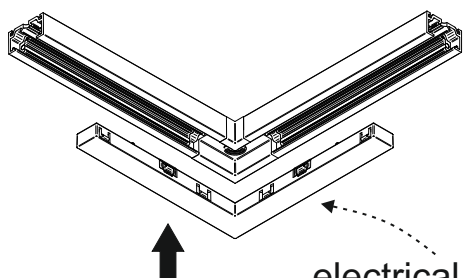


electrical corner
connector „L”

2

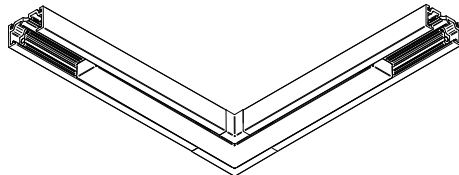


straight - connection

1

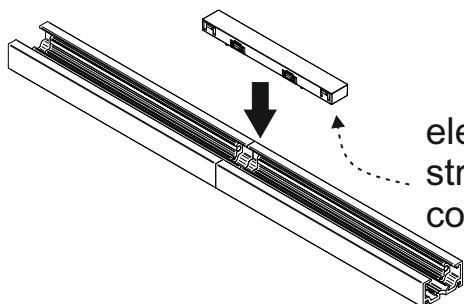


electrical
straight
connector

2

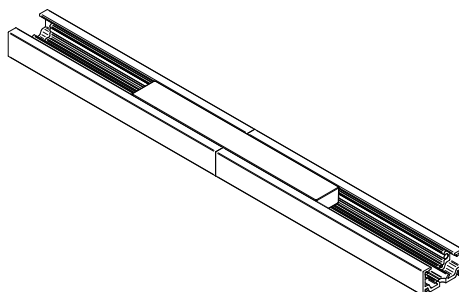

ceiling-wall connection

1

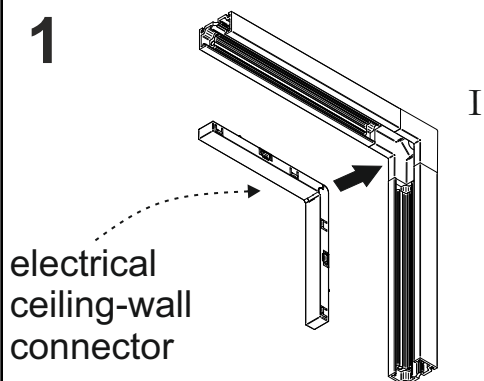

electrical
ceiling-wall
connector

2

