


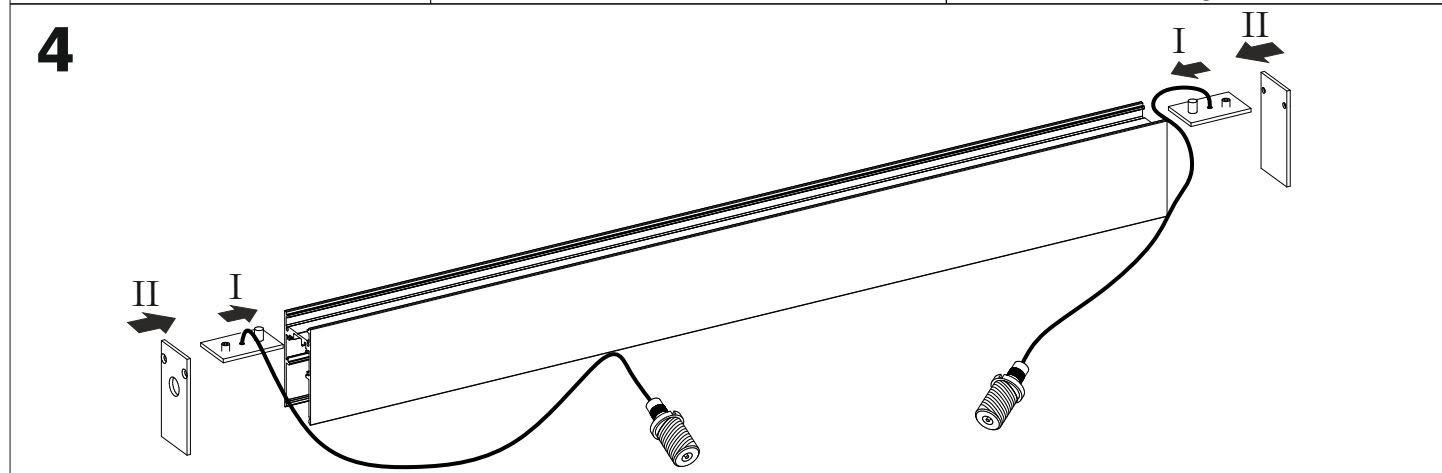
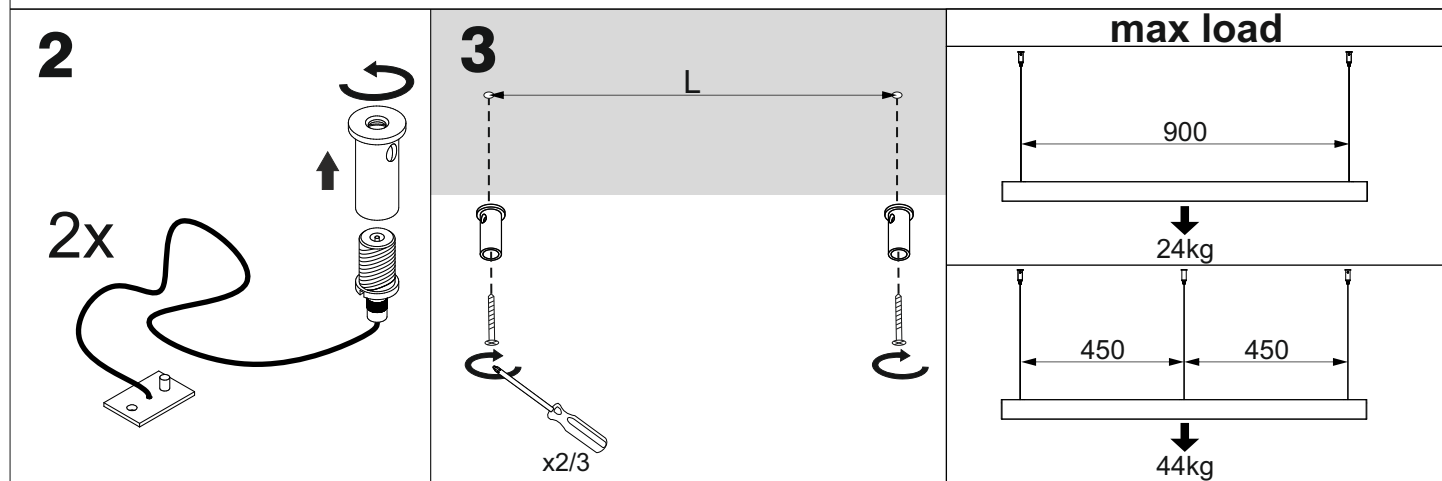


straight multitrack line requirement

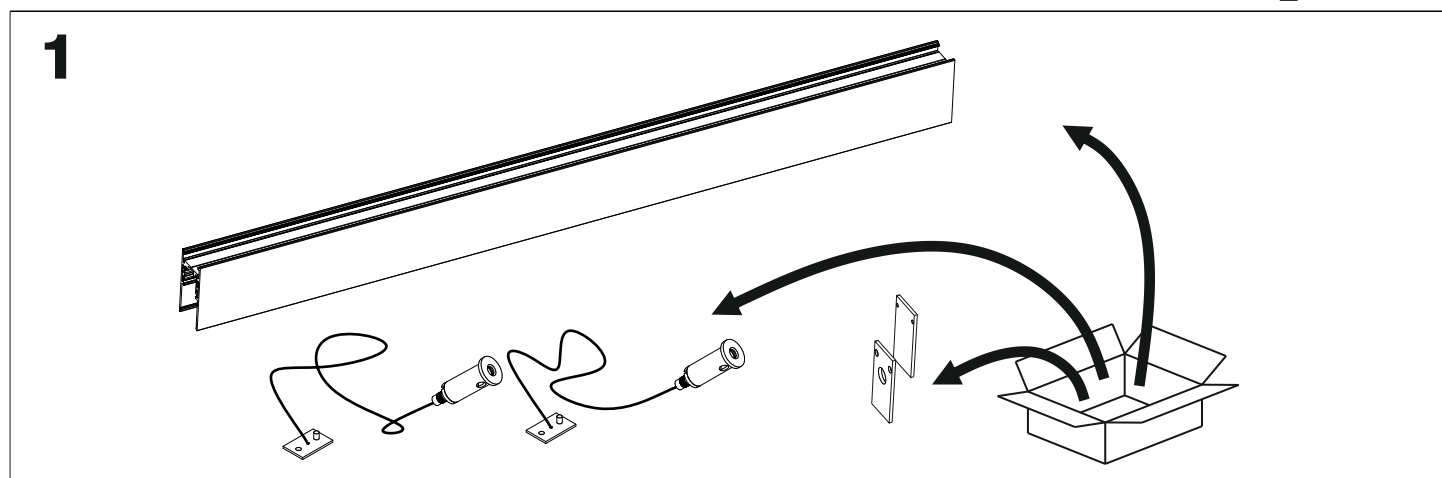


power supply dimensions


DRIVER	60W	100W	200W	PLUG-IN	
				100W	250W
L [mm]	163	300	390	305	275
M [mm]	43	30	30	16	22
H [mm]	32	17	23	19	44

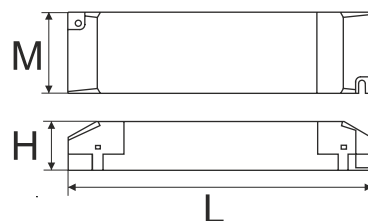

5

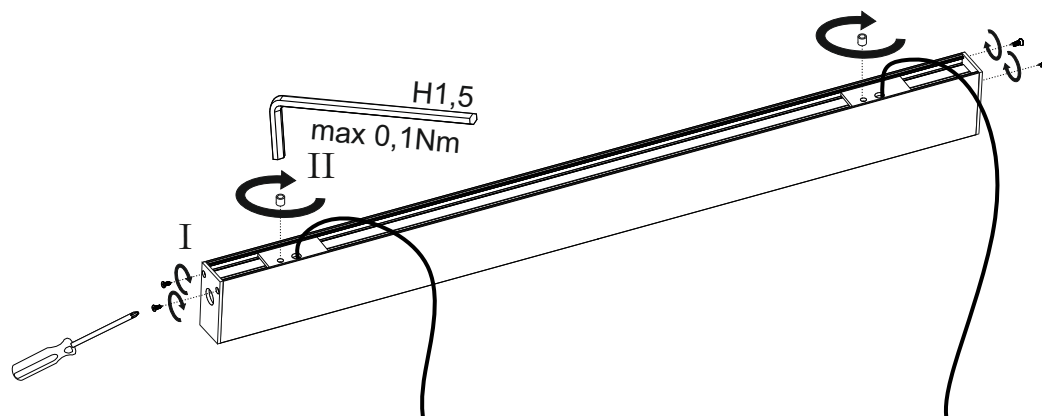


6

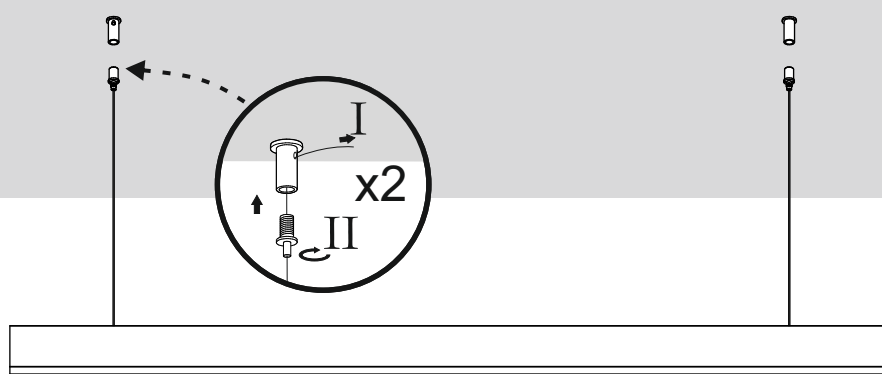


POWER SUPPLY CANOPY


7

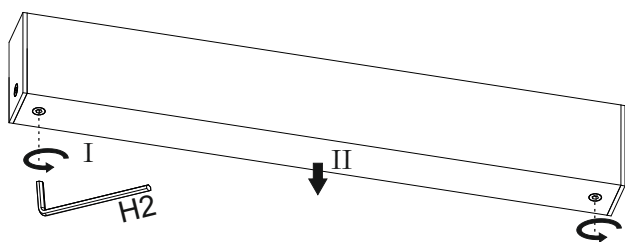


8

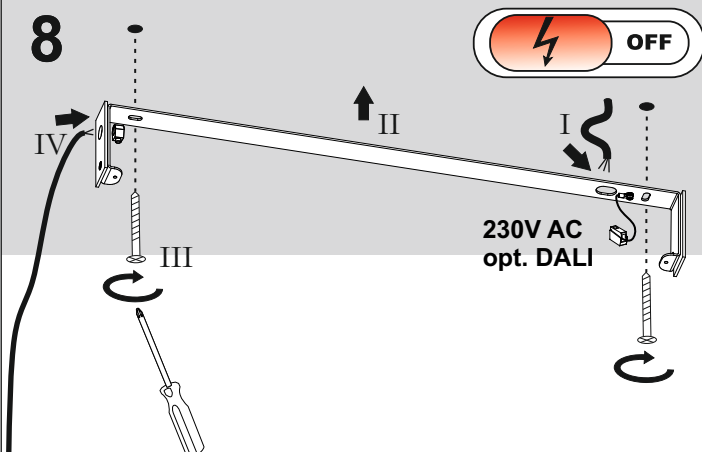


9

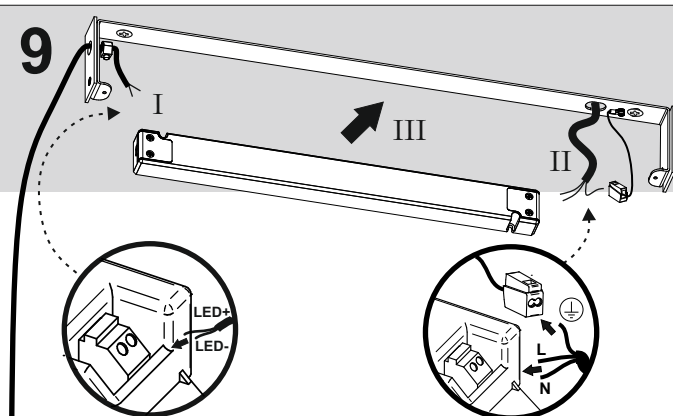

10

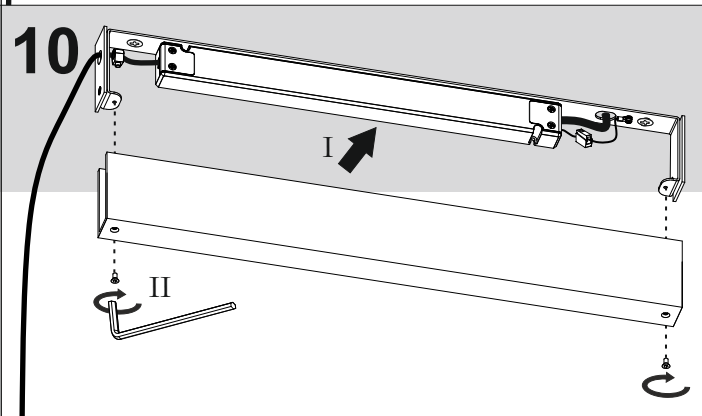


11

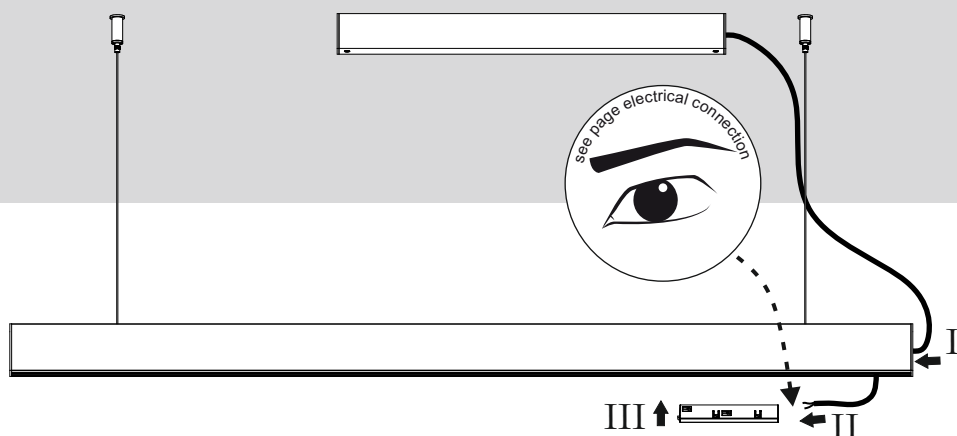


REMOTE POWER SUPPLY


7

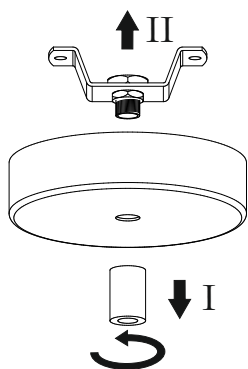


8

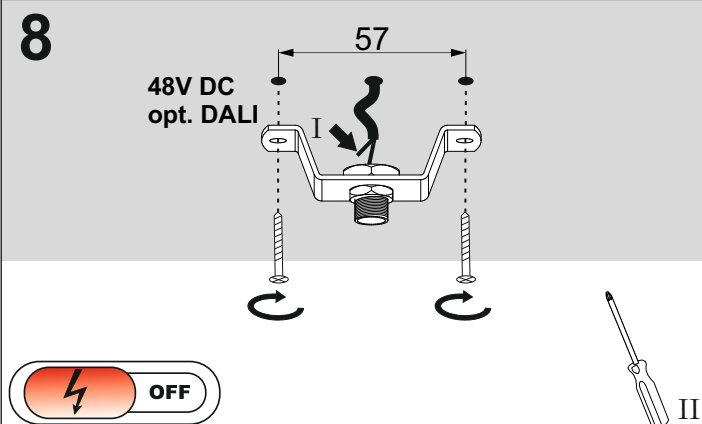


9

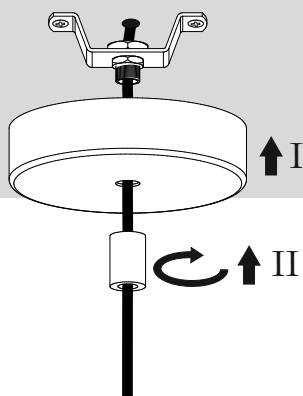

10

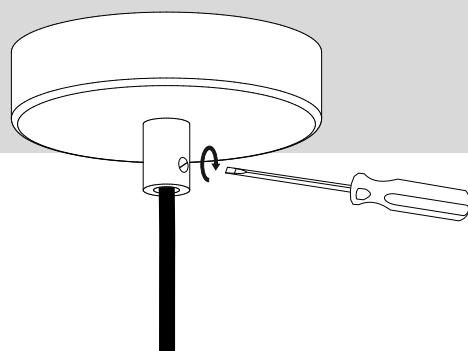


11

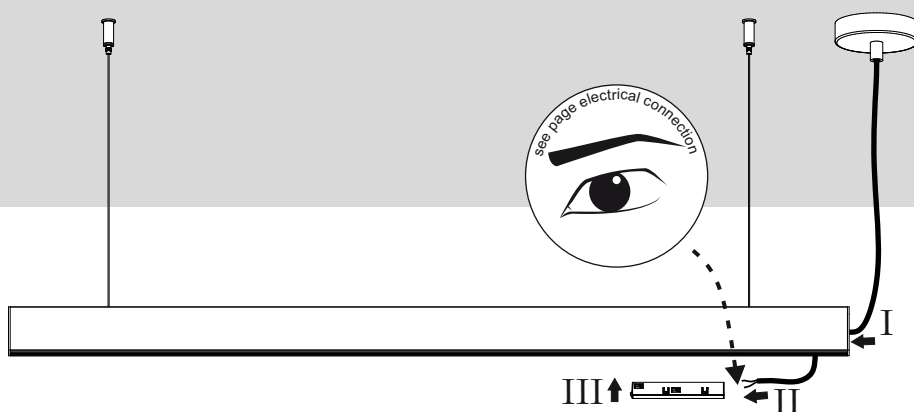


mechanical connection

„L” connection

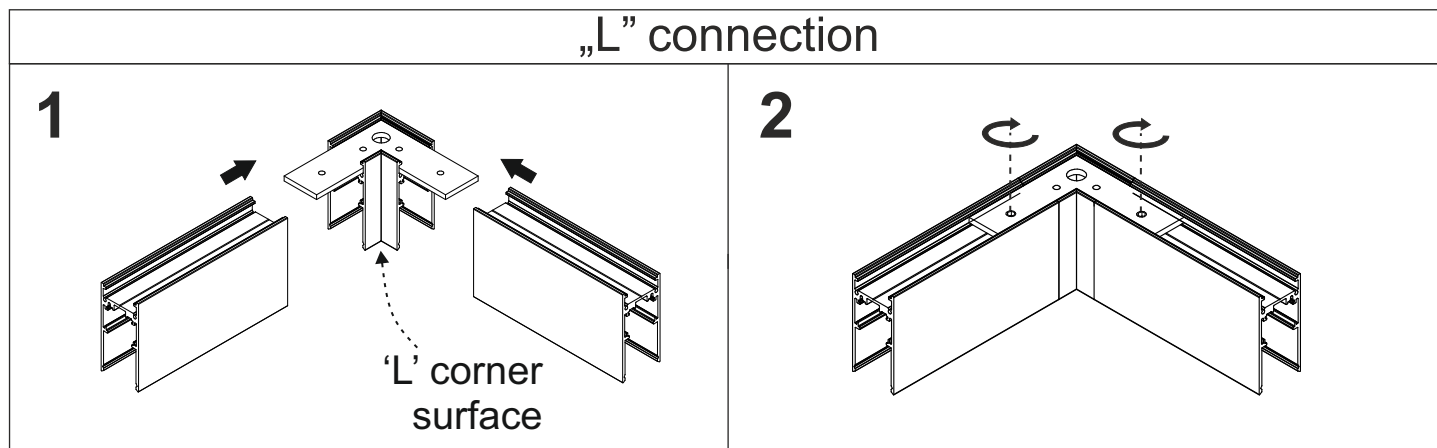


straight connection

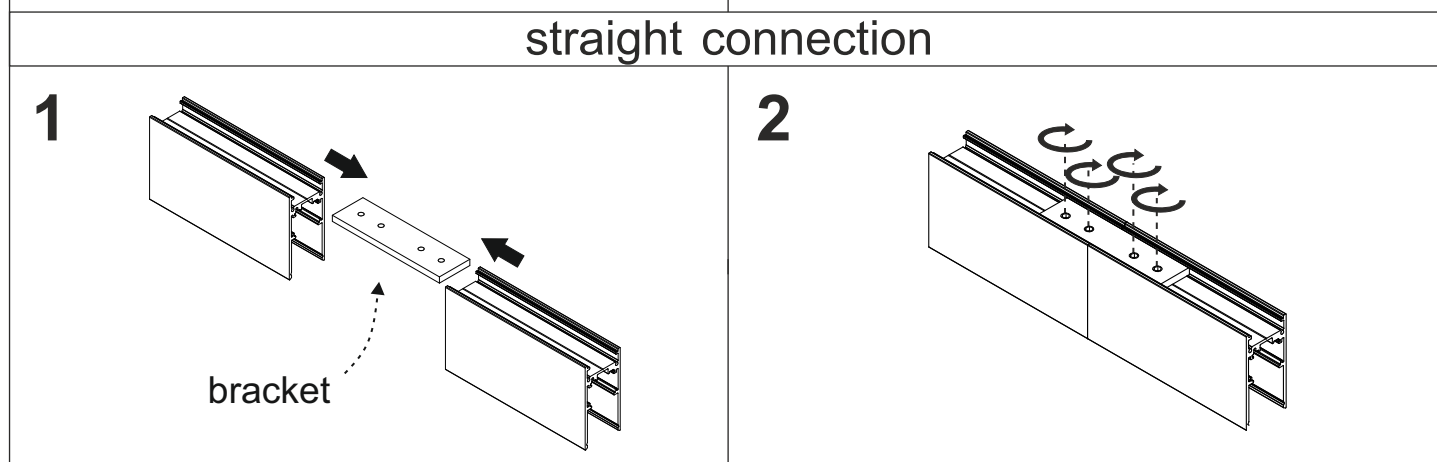


electrical connection


„L” connection

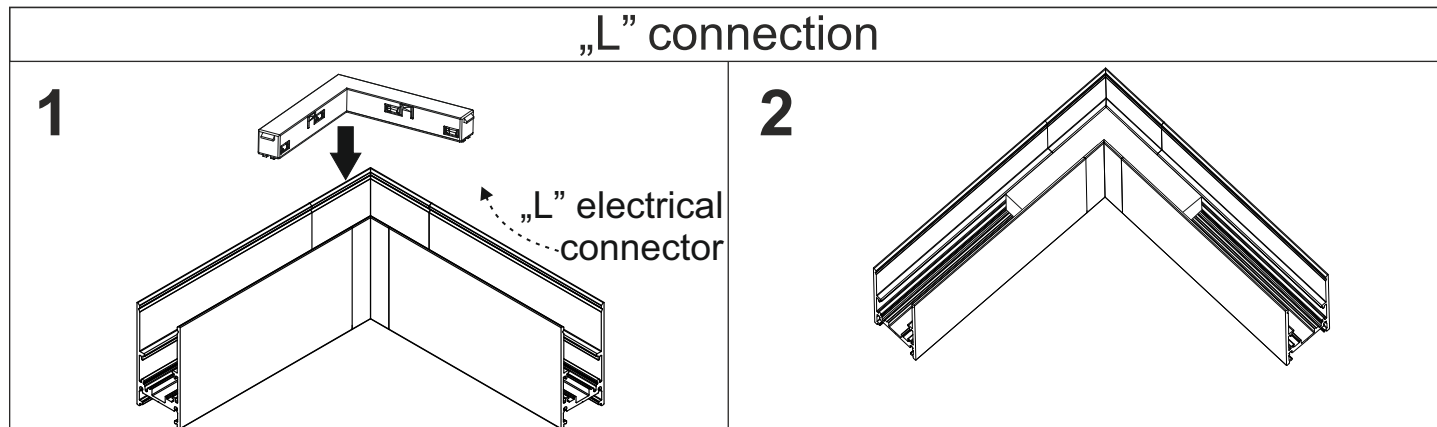



straight connection

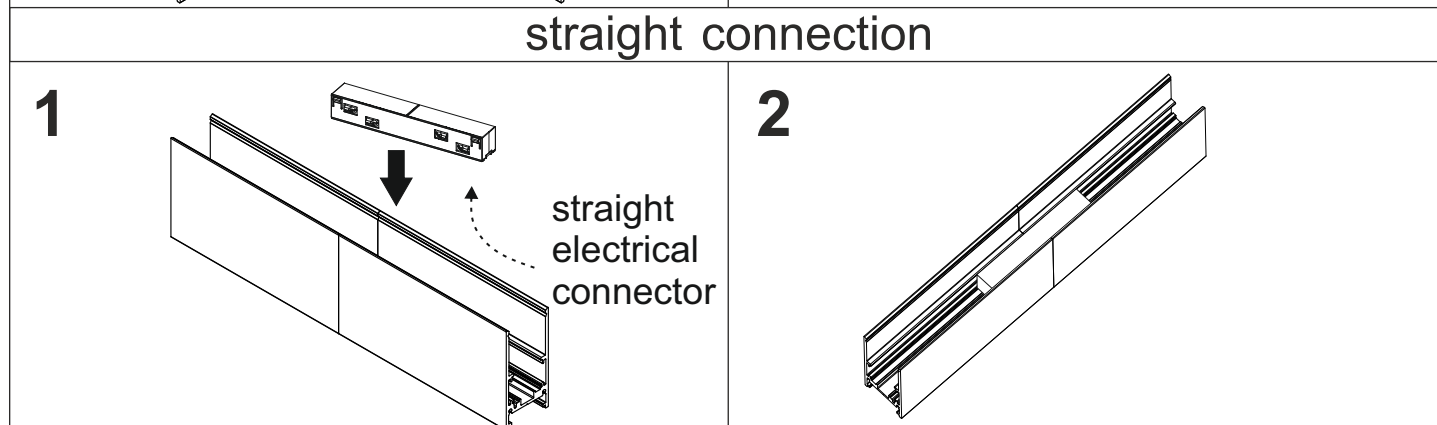


electrical connection

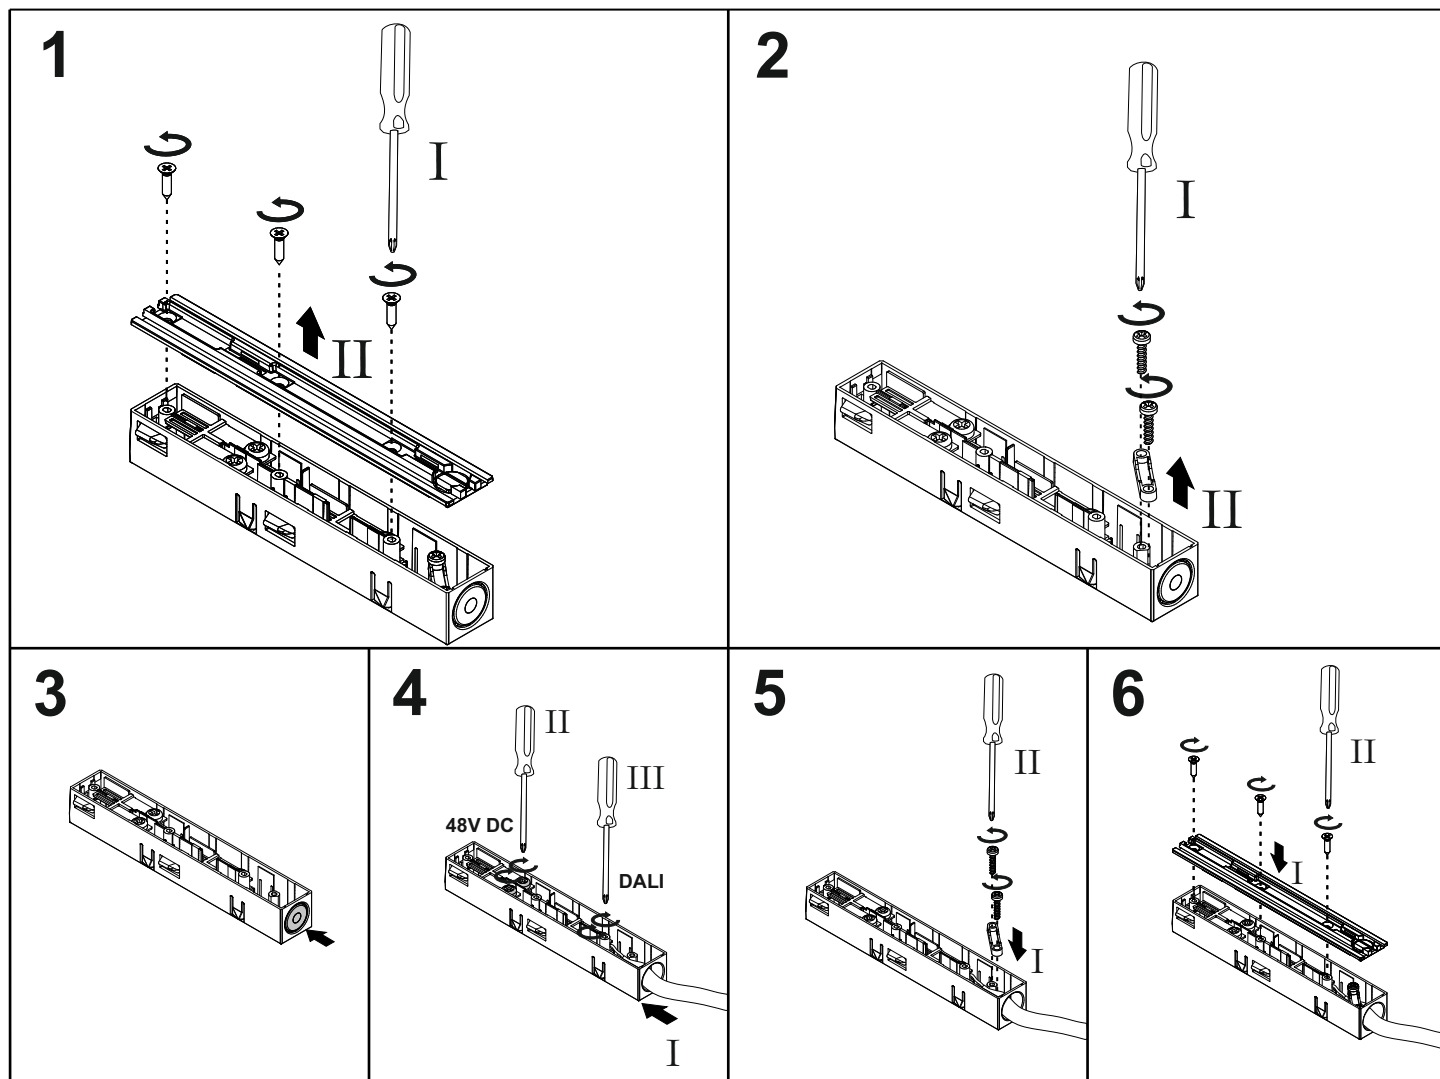

MULTITRACK high suspended - dimensions

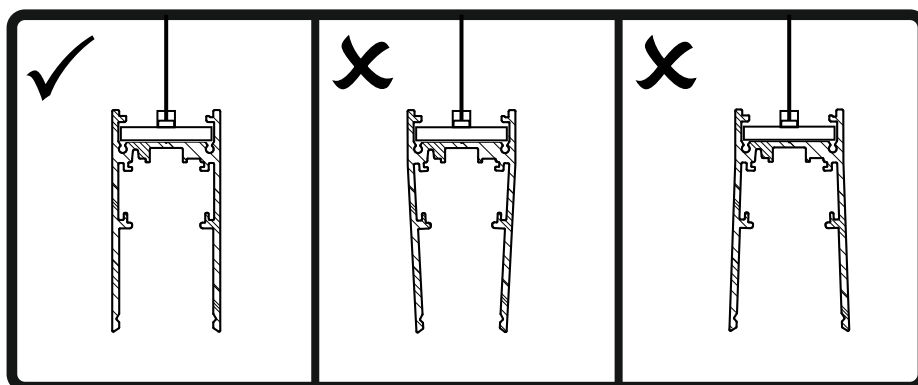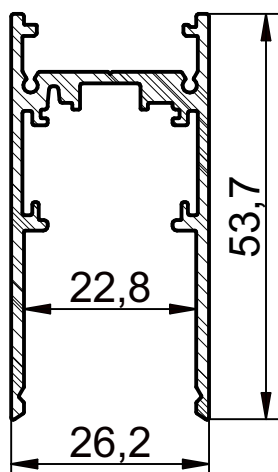

on / off (+ optional DALI)

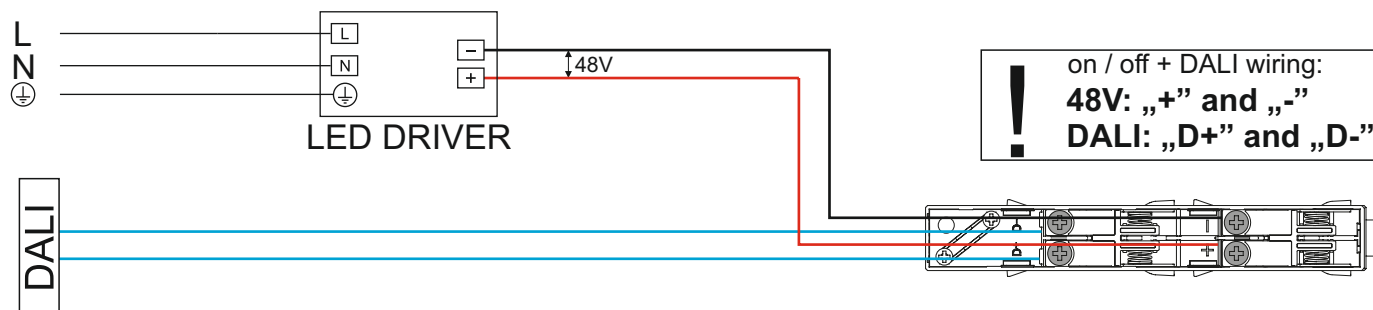

Double circuit on / off

